DATA SHEET



PRODUCT SPECIFICATION


Profile Width 17.9mm **Profile Depth** 5.7mm Max LED Width 13.2mm **Available Lengths** 1m / 2m (Bespoke Lengths Available) 22 **IP Rating** Opal / Semi Diffused (20%) **Lens Cover** Certified CE + RoHS Colour **Buffed Silver** Material Base - Aluminium / Cover - Polycarbonate Included 1x Base / 1x Cover / 2-4 End Caps / 2-4 Fixing Clips

DESCRIPTION

The bendable aluminium profile is designed to deliver a sleek and professional finish for your LED installations.

It features a semi-diffused opal lens, which effectively disperses the light from individual LED diodes, creating a smooth and continuous light-bar effect.

DIMENSIONS

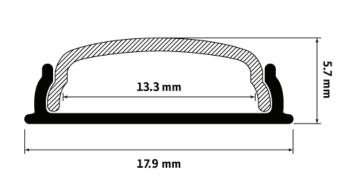

ACCESSORIES



INSTALLATION OPTIONS

Fixing Brackets:


For added convenience, use our specially designed fixing brackets. These can be screwed or nailed into place, allowing the aluminium profile to clip securely onto them.

Adhesive:

Adhesive: Due to its light weight, you can Dot & Dab the profile directly to the surface with a grab adhesive (CT1 for example)

Countersink Screws:

Secure the profile directly to the surface with countersink screws.

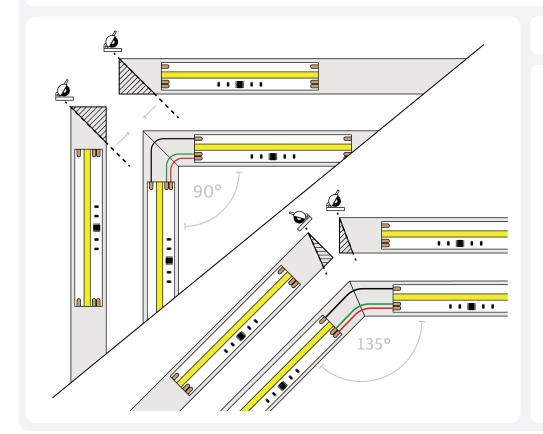

CUSTOMISABLE LENGTHS

Our bendable profile is available in standard lengths of 1m and 2m but they can be easily customized to your specific requirements. Simply cut the profile with straight or mitred cuts by using a hacksaw for a perfect fit.

For further details and support on LED profiles and extrusions, visit our dedicated aluminium profiles and extrusions support page.