
DATA SHEET

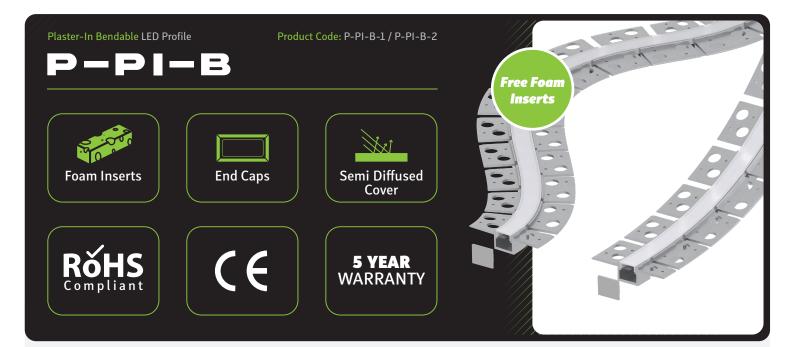

PRODUCT SPECIFICATION

Profile Width 15.5mm (55mm Including Flanges) **Profile Depth** 15.5mm Max LED Width 12.5mm **Available Lengths** 1m / 2m (Bespoke Lengths Available) 20 **IP Rating** Opal / Semi Diffused (20%) **Lens Cover** Certified CE + RoHS Colour Silver Material Base - Aluminium / Cover - Polycarbonate

1x Base / 1x Cover / 2-4 End Caps / Foam Insert


DESCRIPTION

The plaster-in bendable aluminium profile is the perfect solution for projects where you need to seamlessly integrate your lighting into a wall or ceiling.

Designed with perforated flanges, this profile can be easily plastered over, allowing the aluminium housing to blend discreetly into the surrounding surface for a modern, professional

DIMENSIONS

Included

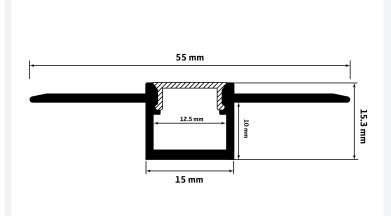

ACCESSORIES



INSTALLATION OPTIONS

Foam Inserts Included:


Foam insert protects the inside of your aluminium profile when plastering to ensure this stays clean, ready to apply your LED strip lights without damages. Included at no additional cost.

First Fix:

Mount the aluminium profile to your dry wall / plasterboard with plasterboard screws.

Second Fix:

Once fixed in place, please ensure the foam insert is in situ before your plasterer starts. This will protect the inside of the profile so the area will be clean and not cause any damage to your LED strips upon installation.

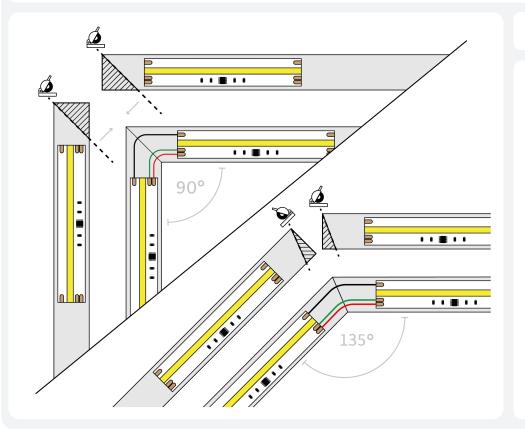

CUSTOMISABLE LENGTHS

Our plaster-in bendable profile is available in standard lengths of 1m and 2m but they can be easily customised to your specific requirements. Simply cut the profile with straight or mitred cuts by using a hacksaw for a perfect fit.

For further details and support on LED profiles and extrusions, visit our dedicated aluminium profiles and extrusions support page.