
DATA SHEET

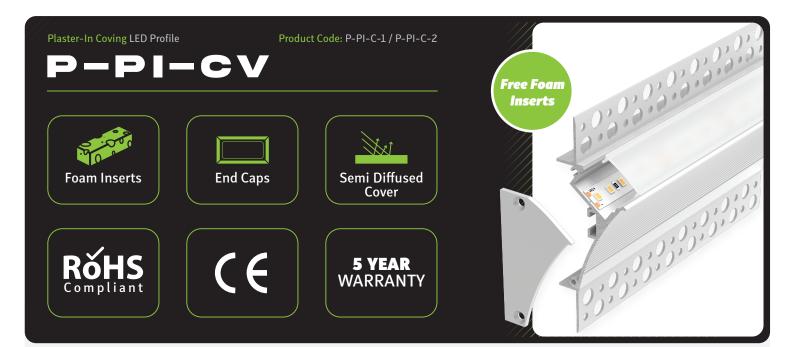

PRODUCT SPECIFICATION

Profile Depth

Max LED Width

Available Lengths

IP Rating

Lens Cover

Profile Width

Certified

Colour

Material

Included

57.8mm (97.8mm Including Flange)

34.6mm

18.8mm

1m / 2m (Bespoke Lengths Available)

20

Opal / Semi Diffused (20%)

CE + RoHS

Silver

Base - Aluminium / Cover - Polycarbonate


1x Base / 1x Cover / 2-4 End Caps / Foam Insert

DESCRIPTION


The plaster-in coving aluminium profile is the perfect solution for projects where you need seamlessly integrate your lighting into a wall or ceiling.

Designed with perforated flanges, this profile can be easily plastered over. allowing the aluminium housing to blend discreetly into the surrounding surface for a modern, professional

DIMENSIONS



ACCESSORIES



INSTALLATION OPTIONS

Foam Inserts Included:


Foam insert protects the inside of your aluminium profile when plastering to ensure this stays clean, ready to apply your LED strip lights without damages. Included at no additional cost.

First Fix:

Mount the aluminium profile to your dry wall / plasterboard with plasterboard screws.

Second Fix:

Once fixed in place, please ensure the foam insert is in situ before your plasterer starts. This will protect the inside of the profile so the area will be clean and not cause any damage to your LED strips upon installation.

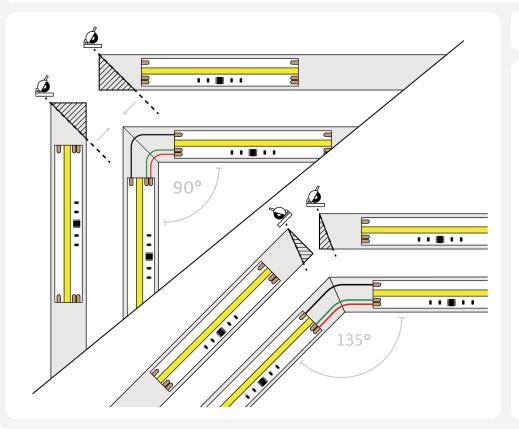

CUSTOMISABLE LENGTHS

Our plaster-in coving profile is available in standard lengths of 1m and 2m but they can be easily customised to your specific requirements. Simply cut the profile with straight or mitred cuts by using a hacksaw for a perfect fit.

For further details and support on LED profiles and extrusions, visit our dedicated aluminium profiles and extrusions support page.